

## Kreiselpumpen mit freier Welle


## Freie Welle

### Selbstansaugende Schmutzwasserpumpen mit offenem Laufrad

Pumpentyp	Kraftbedarf [kW]	Hm Q	Pumpenleistung bei 2900UPM				Anschluss [Zoll]	Grösse (bxlxh) [mm]	Gewicht [kg]
			1	2	5	7			
BOXR/A	0,25	m L/Min.	60	50	40	20	G 1" IG	160x180x210	8
B1½"KQ/A	0,75	m L/Min.	300	260	190	70	G 1½" IG	183x250x300	13
B2KQ/A	1,5	m L/Min.	450	365	250	65	G 2" IG	182x266x305	15
B3KQ/A	2,2	m L/Min.	775	625	370	120	G 3" IG	183x300x294	17
B4KQ/A	4	m L/Min.	1580	1240	830	365	G 4" IG	315x490x405	55
B3XR-A	7,5	m L/Min.	1400	1245	1040	710	G 3" IG	290x453x400	47
B4XR/A	11	m L/Min.	2050	1840	1500	500	G 4" IG	365x505x450	65

### Normalsaugende Sauberwasserpumpen

B1XR	0,75	m L/Min.	145	115	80	50	G 1¼" x 1" IG	185x190x215	8
B1½XR	0,75	m L/Min.	230	200	130	80	G 1½" IG	191x205x227	8,5
B2XR	2,2	m L/Min.	500	450	350	100	G 2" IG	230x237x242	11
B1½TRL	2,2	m L/Min.	300	280	220	100	G 2" x 1½" IG	229x322x276	26
B2TRM	4	m L/Min.	720	550	450	200	G 2½" x 2" IG	255x333x276	25
B3TRM	7,5	m L/Min.	1350	1300	1200	800	G 4" x 3" IG	296x338x318	35

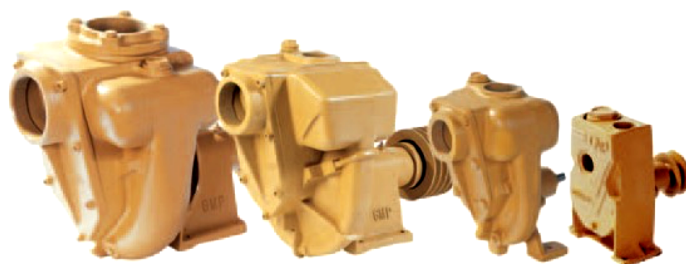

Selbstsaugend mit offenem Laufrad



Normal saugend